



AI-Box1 CamConnect Processor



VOICE
TRACKING



MULTI-CAMERA
SWITCHING



ACTIVE
TRACKING



IP TO USB

The compact and cost-effective CamConnect™ AI-Box1 is a powerful voice-tracking processor for Lumens PTZ cameras. Supporting multiple cameras and as many as 24 microphone arrays, AI-Box1 can transform the audio-visual experience within meeting spaces, lecture rooms and conference suites.

Key Features

- Supports up-to 4 IP cameras
- Supports up-to 24 multiple array microphones
- Supports PBP and 2x2 multiview output
- AI algorithm for people tracking and center stage



Voice Tracking Camera Control

AI-Box1 matches directional audio data with preset camera positions to focus on the active speaker. If the speaker adjusts their position, the camera will intelligently correct the preset to keep the subject in the center of the frame.



Hybrid Audio-Visual Tracking Algorithm

Turning a PTZ camera into an auto-tracking camera, AI-Box1 uses live data from microphones to track a presenter or teacher as they move across a stage. This makes the unit an ideal partner for lecture capture systems.



Multiple Camera Auto Switch

AI-Box1 can use up-to 4 cameras to deliver the best shooting angle, dramatically enhancing AV production and the remote meeting experience. The unit also supports multiview mode, for output of two cameras side by side (PBP) or multiple cameras in a 2x2 gallery.



Microphone Arrays and Digital Signal Processors


AI-Box1 is optimized for a growing line-up of microphones from manufacturers, including Sennheiser, Shure, Yamaha and Nureva. For the latest information, please visit our website.



Product Specifications

Video Input	
Maximum Supported Cameras	4xIP or 3xIP + 1xUSB
IP camera	RTSP(H.264 1080p@60/50, 720p@60/50)
USB Camera	UVC (MJPEG 1080p@30/25, 720p@30/25)
Camera Control Protocol	VISCA over IP / UVC
Video Output	
USB Device	USB 3.0 Type C, UVC
USB format	MJPEG 1080p@30/25, 720p@30/25
HDMI Output	HDMI 2.0 (GUI menu)
HDMI Output format	1080p@60/50 Hz
Other Interface	
Power	USB Type-C Power (5V, 4A)
Ethernet Port	Female RJ-45 10/100/1000 Base-T
USB 3.0 Type A (USB Host)	Supports USB Camera / Mouse / Keyboard
LED Power Indicator	Yes
Power button	Yes
Functions	
Supported Conference Software	Teams / ZoomRoom / Zoom / Google Meet
Supports Multi-array Microphones	Yes, up to 24 microphones
Voice Tracking	Yes, with supported directional microphone arrays
Webpage Configuration	Yes
Camera Auto Switching	Yes
Supports Multi-camera Control	Yes, up to 4 cameras
People Tracking	Yes
Center Stage	Yes
Multiview (Video Source Mixing)	Yes, Side-by-Side (PBP) / 2x2 Gallery
Firmware Update	Over the Air (OTA)
General	
Power Consumption	20W
Operating Temperature	0~40 °C
Operating Humidity	90%
Dimension(WxHxD)	4.96" x 2.76" x1.18" (126 mm x 70mm x 30mm)
Weight	0.8 lbs (350g)

I/O Connections

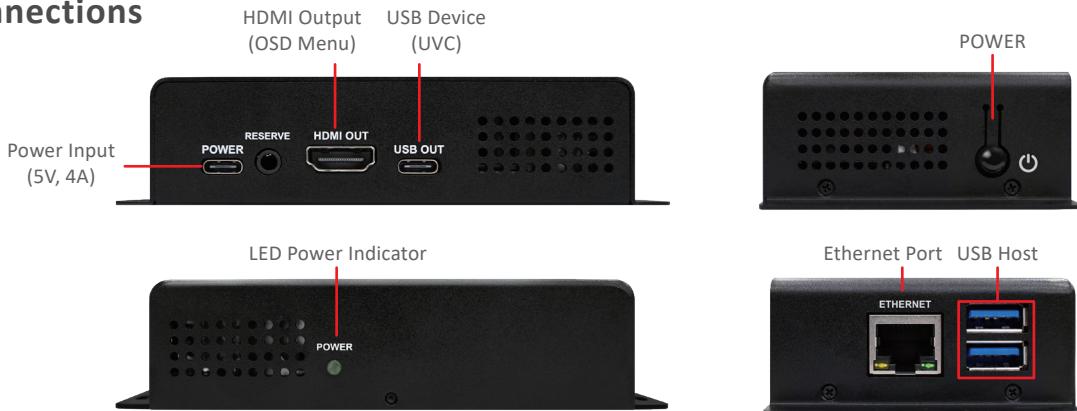

Lumens®

Lumens Integration, Inc.
4116 Clipper Court
Fremont, CA, 94538
Phone: +1-866-600-0988
Fax: +1-510-252-1389

Lumens Europe
De Nayerstraat 17 9470
Denderleeuw Belgium
Phone : +32-473-58-38-95
Fax : +32-2-452-76-00



www.MyLumens.com

Lumens is the registered trademark of Lumens Digital Optics Inc. Changes in specification or design may be done without notification.

*The warranty policy may be different depending on the sales region. Please contact your local salesperson for details.

MAY, 2023